



# DOPAG Metering and Mixing System for low to high viscosity media VARIO-MIX H



Hilger u. Kern / Dopag Group

# VARIO-MIX H

## for low to high viscosity media

The VARIO-MIX H is a hydraulically driven piston pump type metering and mixing system, used especially to continuously handle low to high viscosity multi component media such as epoxy resins, polyurethanes or silicones.

They can be unfilled, filled, abrasive as well as aggressive.

### Typical Applications

- Coating
- Sealing
- Gluing
- Encapsulating



### Features and benefits

- Simple operation
- Variable mixing ratio
- Variable output rate
- Continuous flow rate
- Solvent free



### Equipment

#### Standard

- Pressure vessel and/or drum pumps
- Twin acting piston pumps
- Hydraulic cylinder with lever system and hydraulic power pack
- Static mixing system
  - Twin snuffer valve
  - Disposable static mixer
- Metering computer or SPS

#### Optional

- Static-dynamic mixing system
  - with mixer element monitoring
- Dynamic mixing system
- Material pressure regulator
- Material filter
- Mixing ratio control
- Adjustable output rate
- Start/Stop signal with foot switch
- Manual handle and trigger start/stop fixed to twin snuffer valve

- Volume counter
- Heating
- Pressure vessel with
  - level control
  - agitator
  - automatic refill
- Bypass

## Function

Pressure vessels, mounted onto a portable chassis, are used to supply the material into the piston metering pumps where they are proportioned at the pre-selected ratio. The pumps are driven by a hydraulic motor.


The stroke of the air motor is transferred to the pumps via a lever system. The mixing ratio can be infinitely adjusted between its limits by means of the lever system.

The system is either controlled by a metering computer or PLC. This enables integration into semi or fully automated production processes.

The VARIO-MIX H is fitted with a static mixing system that includes a twin snuffer valve combined with a disposable static mixer.

The valve contains an infinitely adjustable "snuffer" effect to avoid dripping after metering has finished.

Should mixed material be allowed to cure in the mixer, it can be replaced simply and inexpensively, thus avoiding a time consuming, expensive and environmentally damaging flushing cycle.

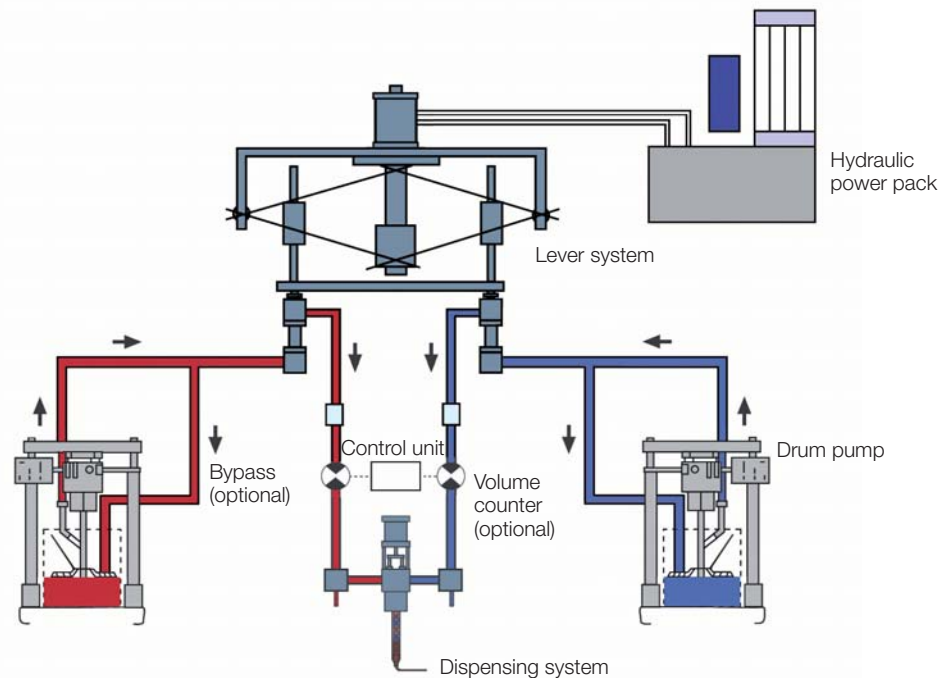

## Technical Data

Flow rate	up to 8 l/min, depending on mixing ratio and viscosity
Mixing ratio	100:100 to 100:6, by volume
Maximum working pressure	200 bar
Mixing system	Static mixing system - Twin snuffer valve - Disposable static mixer
Material supply	Pressure vessels and/or drum pumps
Viscosity range	50 to 80,000 mPa s, with pressure vessel up to 1,000,000 mPa s, with drum pumps
Material characteristics	Unfilled, filled, abrasive and aggressive
Power supply	400 V / 50/60 Hz / 16 A
Maximum air inlet pressure	6 bar
Dimensions L x W x H	approx. 1.200 x 800 x 1.950 mm, depending on configuration
Weight	approx. 450-800 kg, depending on configuration

## Hilger u. Kern / Dopag Group



Hilger u. Kern GmbH  
Industrietechnik

Käfertaler Straße 253  
68167 Mannheim  
Germany

☎ +49 621 3705-0  
☎ +49 621 3705-200

info@hilger-kern.de  
www.hilger-kern.com

Vertriebsbüro Mitte 1  
68167 Mannheim  
☎ +49 621 3705-284  
VBMitte@hilger-kern.de

Vertriebsbüro Mitte 2  
68167 Mannheim  
☎ +49 621 3705-450  
VBMitte@hilger-kern.de

Vertriebsbüro Nord  
30880 Laatzen  
☎ +49 511 8999920  
VBNord@hilger-kern.de

Vertriebsbüro Ost  
01109 Dresden  
☎ +49 351 8116095  
VBOst@hilger-kern.de

Vertriebsbüro Süd  
86391 Stadtbergen  
☎ +49 821 44409960  
VBSued@hilger-kern.de

Vertriebsbüro West  
46238 Bottrop  
☎ +49 2041 706240  
VBWest@hilger-kern.de

DOPAG Dosiertechnik  
und Pneumatik AG

Langackerstrasse 25  
6330 Cham  
Switzerland

☎ +41 41 7855-757  
☎ +41 41 7855-700

info@dopag.ch  
www.dopag.com

DOPAG SCAN ApS  
Birkerød  
Denmark  
☎ +45 45 828090  
info@dopag.dk

DOPAG (UK) Ltd.  
Hartlebury  
United Kingdom  
☎ +44 1299 250740  
uksales@dopag.com

DOPAG Sarl  
Valence  
France  
☎ +33 4 75419060  
contact@dopag.fr

DOPAG ITALIA S.r.l.  
Turin  
Italy  
☎ +39 011 9348888  
info.it@dopag.com

DOPAG FAR EAST  
SDN BHD  
Selangor  
Malaysia  
☎ +60 3 78064564  
info@dopag.com.my

DOPAG Sverige  
Malmö  
Sweden  
☎ +46 40 108595  
info@dopag.dk

The Hilger u. Kern / Dopag group, with more than 300 employees and 7 subsidiaries, is one of the leading manufacturers of machines for metering and mixing systems in the world for plural component polymers and single component media such as greases, oils and pastes.

For more than 30 years the group has developed machines, systems and components to suit your individual needs.